

INSTRUCTION

08-2017

RZB
LIGHTING

Ledona

901543.002.76



IP 65 IK07





220 - 240 V / 0 Hz, 50 - 60 Hz



5 x 2,5 mm²

2,50

mm²

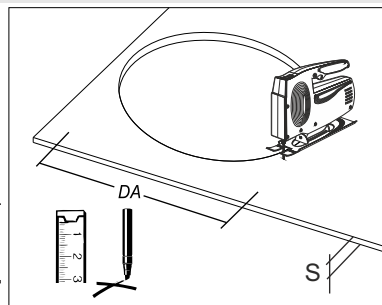

901543.002.76

L 220, B 220, H 3

DA 210, HE
111, S 1-20 mm

LED

36 W

1,83 kg



EEK_{LED}

EEK

CRI

CCT


3350 lm

A+

A+

85

3000K




33

55

0

0

17 A



Die Leuchte darf nur mit ihren vollständigen Schutzabdeckungen betrieben werden.
The luminaire must be used with its complete protective covers only.

EN 12464










EN 12464



EN 12464




RZB
Rudolf Zimmermann,
Bamberg GmbH
Rheinstraße 16
D-96052 Bamberg
Deutschland
Telefon +49 951/79 09-0
Telefax +49 951/79 09-198
www.rzb.de
info@rzb-leuchten.de

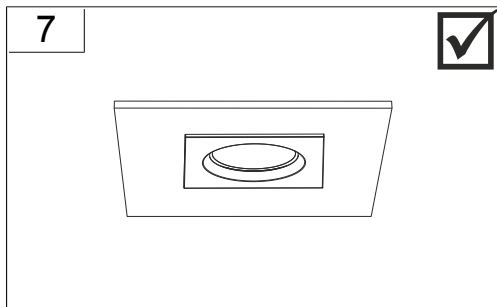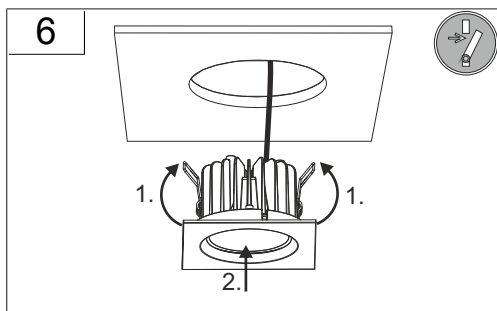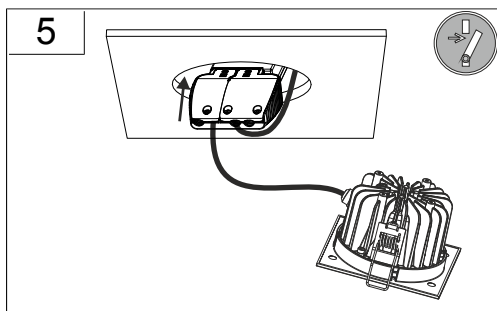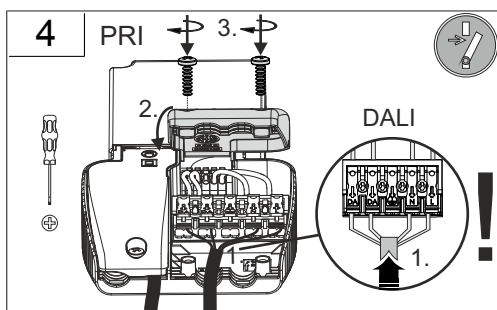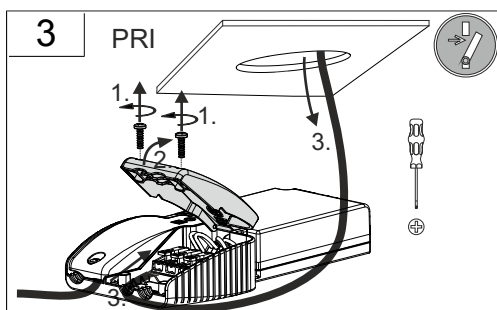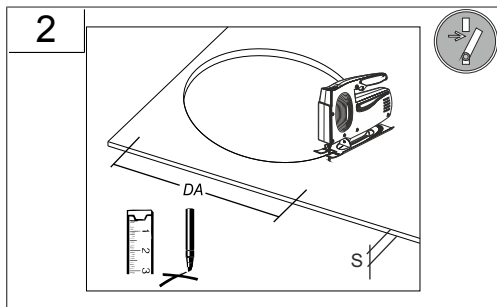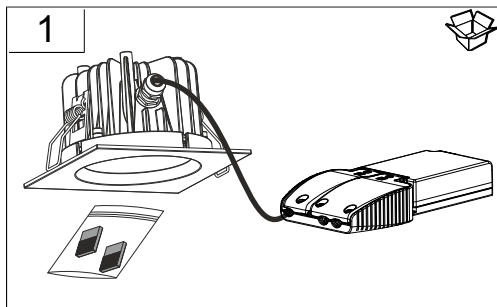




min. L 500 x B 500 x HE (mm)



Leuchte ist nicht geeignet zur Abdeckung
mit Isoliermaterial!
Luminaire is not suitable for covering
with insulating material!

optional für Metall-, Holz- oder Gipskarton-Decken
optional for metal, timber or drywall ceilings

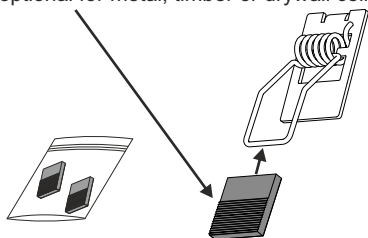

Instruction:



08-2017

