

INSTRUCTION

02-2016

RZB
LIGHTING

Ledona

901518.002



IP 20 IK03






220 - 240 V / 0 Hz, 50 - 60 Hz



2 x 1,5 mm²



1,50 mm²

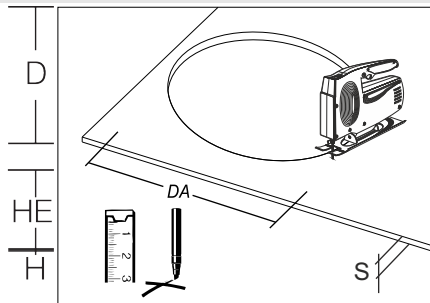

901518.002

D 140, H 3

DA 120, HE
79, S 1-20 mm

LED

20 W

0,8 kg

Φ



EEK_{LED}

EEK



CRI

CCT

1950 lm

A+

A+

85

3000K



B10




B16



C10



C16




17

28


0

0

24 A



instruction
Wartungsplan/
maintenance
schedule



Die Leuchte darf nur mit ihren vollständigen Schutzabdeckungen betrieben werden.
The luminaire must be used with its complete protective covers only.

EN 12464



EN 12464




www.rzb.de

RZB
Rudolf Zimmermann,
Bamberg GmbH
Rheinstraße 16
D-96052 Bamberg
Deutschland
Telefon +49 951/79 09-0
Telefax +49 951/79 09-198
www.rzb.de
info@rzb-leuchten.de


1 / 3



1

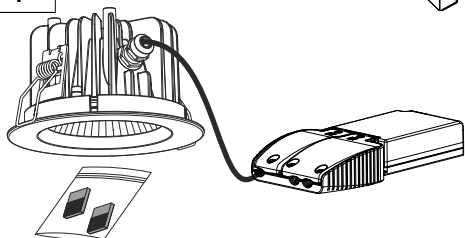


2




3

PRI

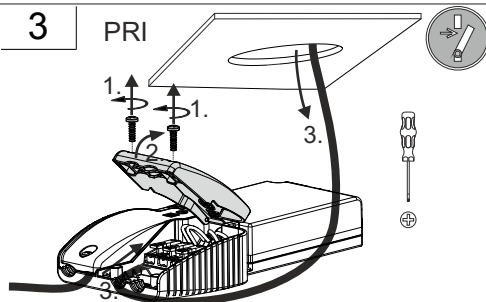


4

PRI

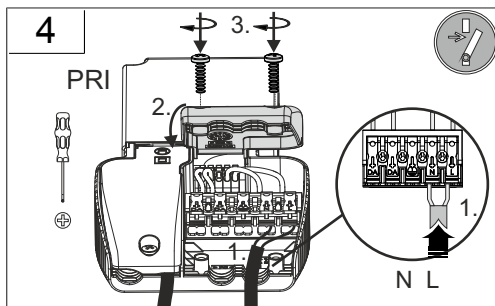


N L


5



6




7






min. L 500 x B 500 x HE (mm)



Leuchte ist nicht geeignet zur Abdeckung
mit Isoliermaterial!
Luminaire is not suitable for covering
with insulating material!

optional für Metall-, Holz- oder Gipskarton-Decken
optional for metal, timber or drywall ceilings

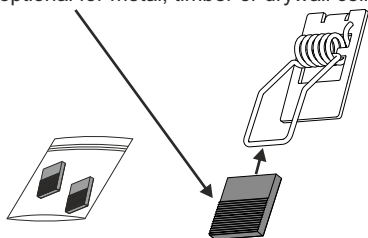

Instruction:



02-2016

